




# Sealants



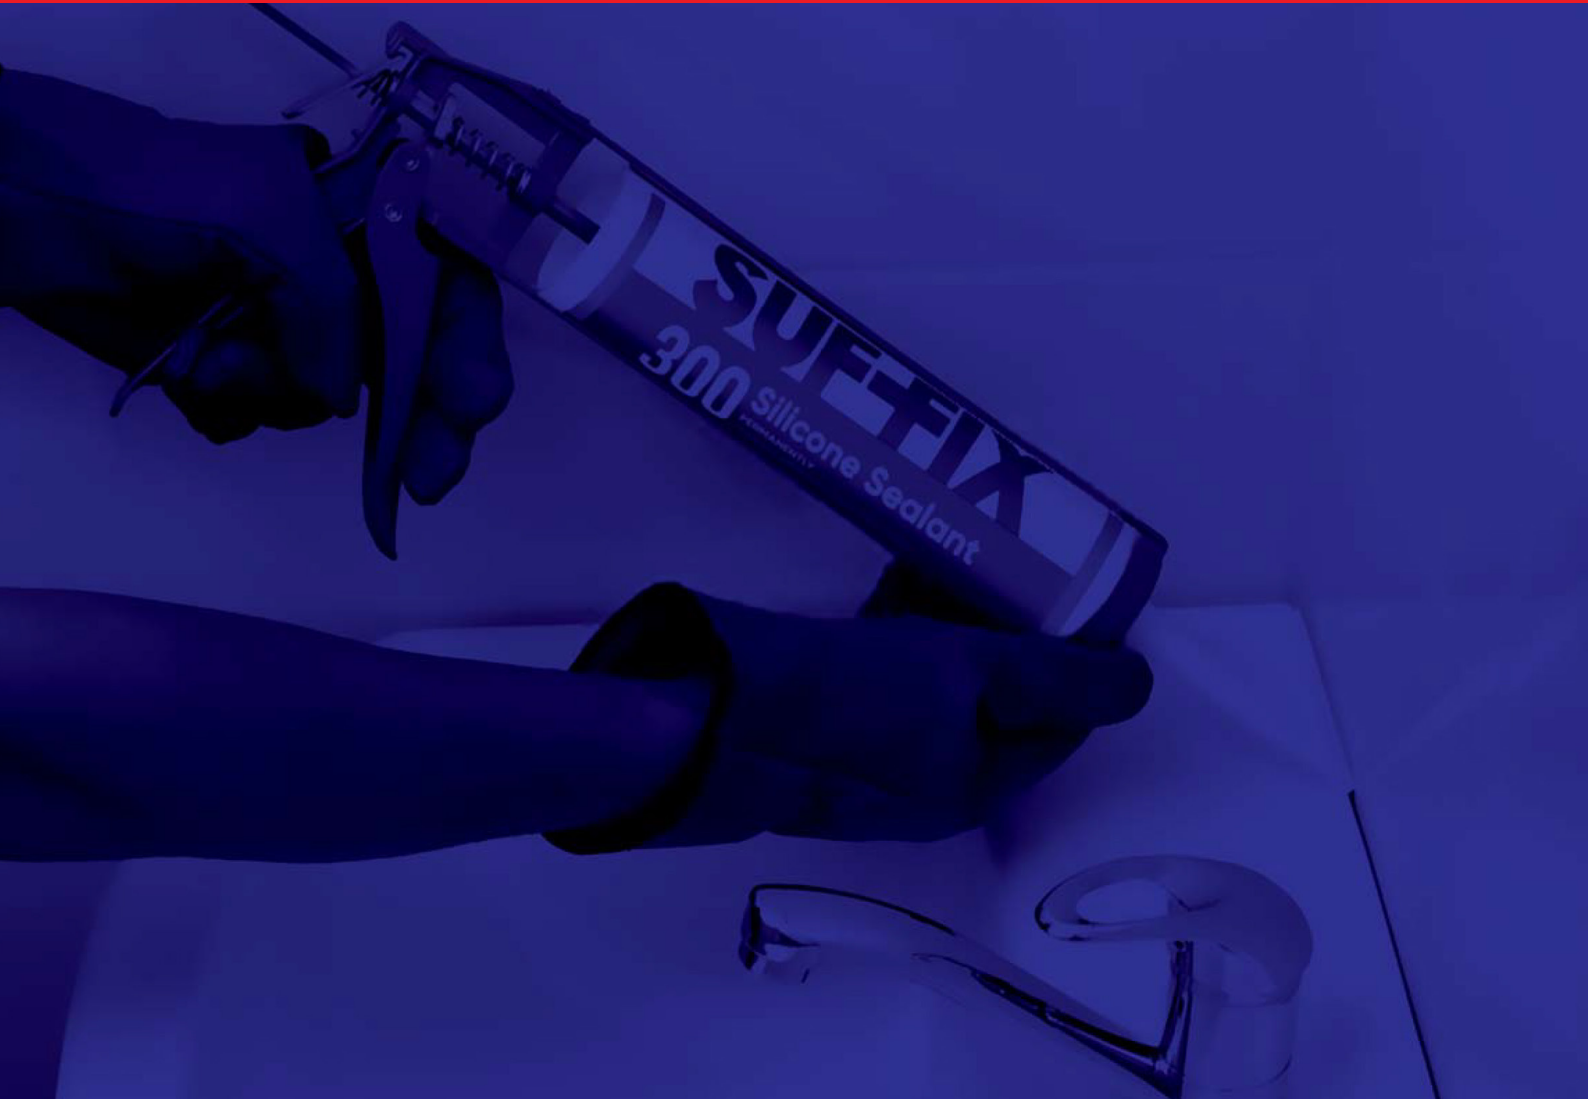

# 402 MS Multi Sealant

SUF-FIX 402 is one component, moisture curing, high performance silane terminated sealing material. SUF-FIX 402 is a new generation isocyanate-solvent free sealant that brings together all the mechanical properties of polyurethane and silicone sealant.




## Properties

- Easy application
- One component
- Solvent and isocyanate free
- No release of volatile organic components (VOC's)
- Non sag
- No bubble formation
- Excellent UV resistance, weathering and aging
- Resistant to chemicals.
- High adhesion property
- Non corrosive towards metals
- Very good adhesion to most construction materials.

## Application Area

- Insulation of window and door elements,
- Connection joints of wood and metal structures,
- Installation and insulation of facade elements,
- Kitchen and bathroom sealing applications,
- Building facades,
- Roof constructions,
- Concrete joints.

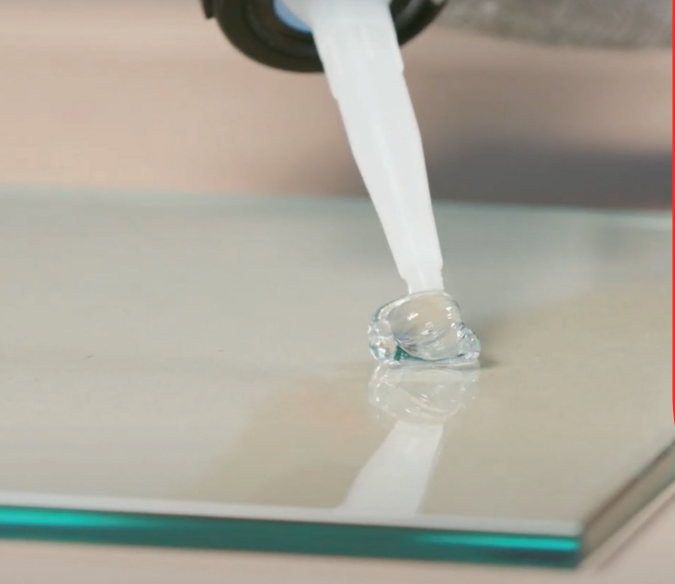

# MS Clear Montage Adhesive

Crystal clear elastic adhesive.



## Properties

- Clear, transparent color.
- Highly tixotropic: Suitable for horizontal and vertical application.
- Eco-friendly, free from isocyanate, solvent, acids and halogens.
- Excellent primerless adhesion to numerous porous and non-porous substrates.
- No bubble formation, even in wet and humid conditions.
- Over-paintable with water based paints.
- No shrinkage.


## Application Area

- It has a good adhesive strength without primer on most common materials such as aluminum, zinc, galvanized steel, stainless steel, copper, natural stone, concrete, brick, etc.
- Common application areas are: Transparent and elastic bonding in construction and building applications.
- Invisible bonding and sealing of glass and other transparent materials in indoor applications



# 400 High Tack MS Polymer

400 High Tack MS Polymer one component, high quality and professional adhesive with high adhesive strength and initial tack. It is suitable for bonding heavy building materials without the use of clamps and/or fixing tape.

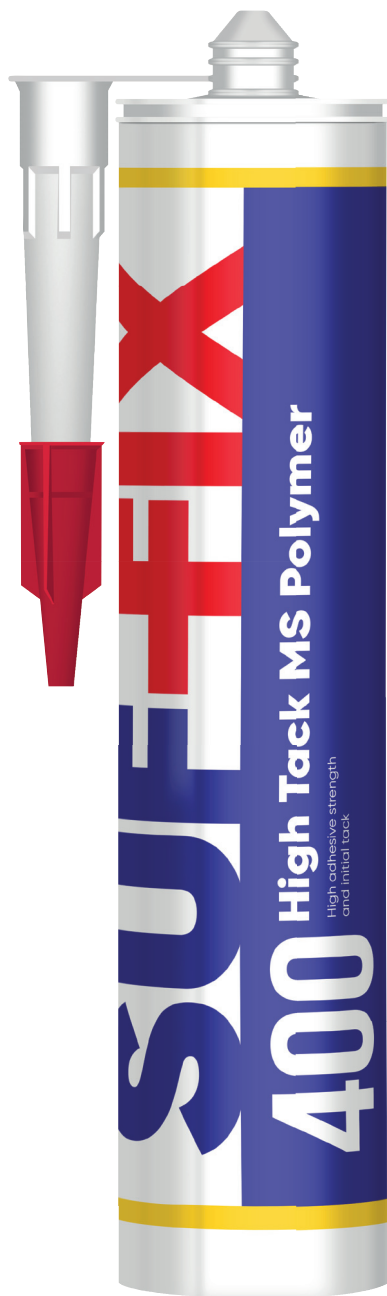

## Properties

- High initial tack.
- Eco-friendly, free from isocyanate, solvent, acids and halogens.
- Excellent primerless adhesion to numerous porous and non-porous substrates.
- Excellent elasticity, no bubble formation, waterproof, no shrinkage, over-paintable.

## Application Area

It is suitable for elastic bonding of panels, profiles and other pieces on the most common substrates such as: stone, concrete, mirrors, glass, plasterboard, PU, PVC, polyester, plastics, enamel, ceramic, copper, lead, zinc, aluminium, metals, R.V.S., wood, HPL and cement fibre panels etc.

Type Color	Volume Weight	Box Pcs
White,Black	290 ml	12
White,Black	600 ml	12



# 535 Construction PU Sealant

535 Construction PU Sealant is a one-component, low-modulus polyurethane sealant that cures on exposure to atmospheric humidity. It possesses excellent adhesion to all typical construction materials such as cement based materials, brick, ceramic, glass, wood, galvanized and painted sheet iron and various plastics.

## Properties

- Possesses permanent elasticity.
- 25 % movement capability.
- No surface tackiness after full cure.
- Do not pick up dirt.
- No shrinkage.
- Cures bubble-free.
- No sagging – Thixotropic.
- Paintable.

## Application Area

- Expansion joints between many different construction materials.
- Movement and connection joints in floors.
- Indoor and outdoor applications for pedestrian and traffic areas.
- Joints between prefabricated construction materials.
- Sealing and bonding of ventilation ducts, gutters and spouts etc.
- For expansion joints between pre-cast concrete panels.



Type Color	Volume Weight	Box Pcs
White	310 ml	12
Black	310 ml	12
Grey	310 ml	12
Agate Grey	310 ml	12
Signal Brown	310 ml	12
White	600 ml	12
Black	600 ml	12
Grey	600 ml	12
Agate Grey	600 ml	12
Signal Brown	600 ml	12
Golden oak	600 ml	12
Beige	600 ml	12



# 545 Automotive & Construction Metal PU Sealant

545 Automotive & Construction Metal PU Sealant is a one component, high-modulus polyurethane sealant that cures on exposure to atmospheric humidity. It possesses excellent adhesion to sheet iron, aluminum, stainless steel, lead, copper, ceramic, glass, wood and various plastic materials.



## Properties

- Permanently flexible
- Non-sag consistency - Exceptional thixotropy
- Non-sticky / does not pick up dirt
- High mechanical resistance
- Improved storage stability
- Easy to gun, can be easily smoothed
- Over-paintable

## Application Area

- Body construction of cars, containers, caravans etc.
- Sealing and bonding of ventilation ducts, gutters and spouts etc.
- Sealing of sheet metal seams
- For vibration reduction in all type of sheet metal assembly works
- Sealing against water, air, gas and dust. have to fulfil high demands.

Type Color	Volume Weight	Box Pcs
White	310 ml	12
Black	310 ml	12
Grey	310 ml	12
Red	310 ml	12
White	600 ml	12
Black	600 ml	12
Grey	600 ml	12
Red	600 ml	12



# 300 Silicone Sealant

300 Silicone Sealant, is an one-component acetoxy cure silicone sealant for a range of general sealing and glazing applications. It provides a strong adhesion and suitable for use on common non-porous building materials.



## Properties

- Stays permanently elastic after curing.
- Remains flexible in low and high temperatures.
- Resistant to temperature extremes.
- Resistance to aging, cracking and discoloring.

## Application Area

- Sealing around windows and doors.
- Sealing in DIY applications.
- On bathroom, kitchen and plumbing applications.
- Connection and expansion joints on glass, porcelain, steel etc.
- Sealing electric, telephone etc. sockets and switches.

Type Color	Volume Weight	Box Pcs
Transparent	Gw. 325 g. /280ml ± %2	24
White	Gw. 325 g. /280ml ± %2	24
Black	Gw. 325 g. /280ml ± %2	24
Brown	Gw. 325 g. /280ml ± %2	24
Grey	Gw. 325 g. /280ml ± %2	24
Golden Oak	Gw. 325 g. /280ml ± %2	24
Light Ivory RAL1015	Gw. 325 g. /280ml ± %2	24
Bronz	Gw. 325 g. /280ml ± %2	24
Aluminium - grey	Gw. 325 g. /280ml ± %2	24
Transparent	310 ml	24
White	310 ml	24
Black	310 ml	24
Transparent	300 ml (Reusables)	24
White	300 ml (Reusables)	24



# 310 Kitchen & Bathroom Sealant

310 Kitchen & Bathroom Sealant Acetoxy cure, high performance, mold-proof silicone sealant designed for gap filling and sealing in a wide range of sanitary applications.



## Properties

- %100 silicone, does not contain any solvent.
- Prevents mold formation on its surface.
- Low modulus, high elasticity.
- Does not crack or discolor.
- Fast curing.
- No shrinkage.
- Acetoxy curing system.

## Application Area

- Sanitary joints: Sealing applications in kitchens and bathrooms.
- Sealing of connection joints.
- Weather seal application.
- Glazing works.

Type Color	Volume Weight	Box Pcs
Transparent	280 ml	24
White	280 ml	24



# 405 Building & Construction Silicone Neutral

405 Building & Construction Silicone Neutral premium performance silicone sealant designed for gap filling and sealing in a wide range of use in building and construction. It combines the advantages of outstanding adhesion to building materials and non-corrosive and odorless



## Properties

- 100% solventless silicone.
- Excellent weatherproof and UV resistant.
- No Cracking or Shrinking, Water resistant.
- Very low odor and noncorrosive.
- Excellent flexibility and adhesion to numerous porous and non-porous.
- Substrates for large scale construction and glazing applications.
- Fast curing, low modulus, high elasticity.
- High viscosity non slump formula.

## Application Area

- Weather sealing and joint sealing for walls, windows and doors.
- Glass to glass and glass to aluminium sealing.
- Sealing applications in kitchens and bathrooms.
- Sealing of connection joints in building industry (brick, wall, concrete, PVC, wood, glass etc.)

Type Color	Volume Weight	Box Pcs
Transparent, white, black	310 ml	24



# 505 Siliconized Acrylic Sealant

505 Acrylic Sealant, is one-component acrylic emulsion based sealant reinforced with silicone emulsion. It has superior adhesion and good elasticity.



## Properties

- Its siliconized structure, makes it possible to handle movement up to 15%
- Water based & Non-toxic.
- Very low VOC content.
- Water-proof after curing.
- Over paintable.
- Very easy to apply and clean.
- Can be used on all porous surfaces such as brick, concrete, wood etc.

## Application Area

- Sealing of low movement joints between various construction materials(wood, concrete, brick etc.)
- Sealing joints between windows, walls, doors etc.
- Filling cracks in walls and on ceilings.

Type Color	Volume Weight	Box Pcs
White	310 ml	24
Black	310 ml	24
Grey	310 ml	24
Brown	310 ml	24
Ligth Ivory	310 ml	24
Golden Oak	310 ml	24
Beige	310 ml	24
White	600 ml	12
Black	600 ml	12
Grey	600 ml	12
Brown	600 ml	12



# 506 Acrylic Sealant

506 Acrylic Sealant is one-component universal acrylic sealant suitable for filling cracks and joints both indoors and outdoors. It's a cost-effective plastic-elastic sealant ideal for particularly static joints.



## Properties

- Over paintable.
- Very low VOC content.
- Very easy to apply and clean.
- Water-proof after curing.
- Can be used on all porous surfaces such as brick, concrete, wood etc.
- No odour.

## Application Area

- Sealing of low movement joints between various construction materials (wood, concrete, brick etc.)
- Filling cracks in walls and on ceilings.
- Sealing joints between windows, walls, doors etc.

Type Color	Volume Weight	Box Pcs
White	310 ml	24
Grey	310 ml	24



# 950 HVAC Sealant

950 HVAC Sealant is a fiber reinforced, water based duct sealant.



## Properties

- Excellent workability.
- Very low VOC content.
- Permanently flexible.
- No drip nor sag.
- Low shrinkage.
- Indoor and outdoor use.

## Application Area

Suitable for sealing metal to metal joints to prevent air leaks in airconditioning,refrigeration,ventilation and air distribution systems.

Type Color	Volume Weight	Box Pcs
White	310 ml	12
Grey	310 ml	12



# 801 Neutral Mirror Silicone

801 Neutral Mirror Silicone High performance neutral cure silicone which is particularly designed for bonding the mirrors in all kinds and sizes without harming the mirror. A bonded mirror is safer because there is no risk of large pieces of glass falling in the event of breakage.



## Properties

- Highly elastic, +/-25% movement capability.
- Excellent primerless adhesion to numerous porous and non-porous substrates, Safer mirror construction with non-corrosive properties.
- Permanently elastic.
- Fast curing.
- %100 Silicone, solventless.
- Solvent free, very low odor.
- Adjustable, easy to apply.
- High viscosity non slump formula.
- One component moisture-cured.
- Excellent tooling properties.
- Resistant to temperature extremes (-60 °C to +180 °C)

## Application Area

- Mirror walls in shops, restaurants, gymnasiums.
- Bonding mirrors to sound plaster, concrete, wood etc.
- Bonding mirrors to doors or ceramic wall tiles.

Type Color	Volume Weight	Box Pcs
Transparent	310 ml	24

# 806 Wood Filler

806 Wood Filler is a one component, high-quality flexible wood sealant based on acrylic dispersion. Can be used for filling, fixing and repair. In addition to wood, adheres well to concrete, plaster, cement, plaster boards, bricks and metals.



## Properties

- Solvent free.
- Very low VOC content.
- Colourfast and waterproof after curing.
- Can be varnished and sandable after curing.
- Withstands surface movement up to 15%
- Very good adhesion on many porous surfaces.
- Very easy to apply.

## Application Area

- Sealing of joints between wooden floors and walls.
- Sealing of laminate flooring.
- Sealing of joints between floors and skirting boards.
- Suitable for cracks in wooden floors.

Type Color	Volume Weight	Box Pcs
18 colours	310 ml	12
18 colours	5 kg	1
18 colours	10 kg	1



# 810 Roof & Plumbing Neutral Silicone

810 Roof & Plumbing Neutral Silicone, is a one component, high quality Neutral curing 100% silicone sealant designed for applications where long term durable plumbing, spouting, roofing, flashing, cladding and guttering are required. It is suitable for sealing of connection.



## Properties

- Outstanding adhesion without primer on joining elements made from brick, stone, concrete, wooden, plastic, steel, aluminum, zinc, porcelain, ceramic, PVC, metal, glass and porous surfaces,
- Highly elastic, +/-25% movement capability
- UV, water and weather proof
- Non-corrosive neutral cure
- Fast curing
- Low odor
- Interior/exterior use
- Easy to apply
- Chemically resistant
- Non-sag

## Application Area

- Joints and cracks in gutters • Flashing • Downpipes • Lap joints
- Skylights • Cladding walls • Vent and HVAC ducts systems

Type Color	Volume Weight	Box Pcs
Brown	310 ml	24
Grey	310 ml	24